



NOTES:

1. MAX. MOUNTING TORQUE = 6 lb-in.
2. HARDWARE IS INCLUDED.

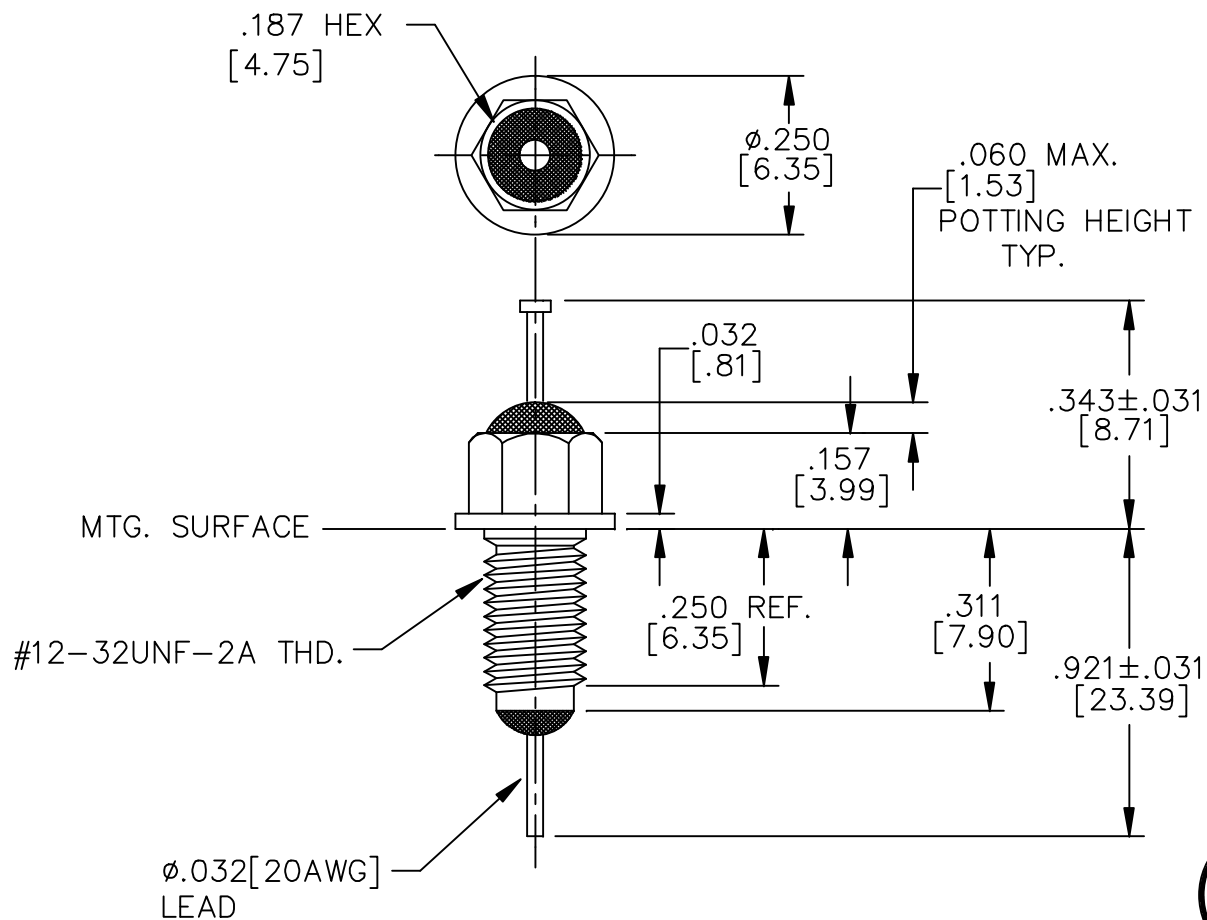

LEAD FINISH	SILVER
BUSHING FINISH	SILVER
CAPACITANCE	0.012 μ F MIN.
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C 200 VDC MAX. 125°C 200 VDC MAX
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
10	27
30	30
100	70
1 GHz	70
10 GHz	70



SCHEMATIC



MARKING:

PART: SCIF-3323-000
 BAG: SCIF-3323-000
 DATE CODE
 QTY.

	0	REV. N.D.	TOLERANCES UNLESS OTHERWISE SPECIFIED
	CN 46096-ENG	CHANGE NOTICE	Fractions $\pm 1/64$
			Dec. .xx \pm
			Dec. .xxx $\pm .010$
			Angles $\pm 0^{\circ} 30'$
			CODE IDENT. NO. OLSP2

 SPECTRUM CONTROL INC.		FAIRVIEW PENNSYLVANIA	
Dwn. KAUFFMAN	Description Pi	Ckd. 1-08-09	RESIN SEAL FILTER
Engr. DEVINE	SCIF-3323-000		
 THIRD ANGLE PROJECTION			