



MSD INC.

ENGINEERING DATA SHEET

RELAY TYPE: FCB-205-BZ1	COMPUTER PART No.: 9347544	TEST PROCEDURE
CUSTOMER/SPECIFICATION: CATALOG ITEM	REV NONE	MSDP-791

TEST REQUIREMENTS

COIL RES.:  $\pm 10\%$  20 OHMS OPERATE TIME: 5ms MAX RELEASE TIME: 5ms MAX  
 CONTACT MAKE BOUNCE: 1ms MAX N.O. BREAK BOUNCE: N/A  
 CONTACT STABILIZATION TIME: N/A RATED COIL VOLTAGE: 6Vdc  
 CONTACT RES.: MFG TEST: .040 OHMS @ 10mA - 6Vdc FINAL TEST: .050 OHMS @ 10mA - 6Vdc  
 CONTACT VOLTAGE DROP: FINAL TEST: .100 V MAX @ 5A - 6Vdc  
 HI-POT: 1000 Vrms ALL POINTS  
 INSULATION RESISTANCE: 100 MEGOHMS MIN. @ 500 Vdc  
 VIBRATION: N/A  
 SEAL TEST:  $1 \times 10^{-8}$  MAX LEAK RATE COIL TRANSIENT SUPPRESSION: N/A  
 OTHER: \_\_\_\_\_

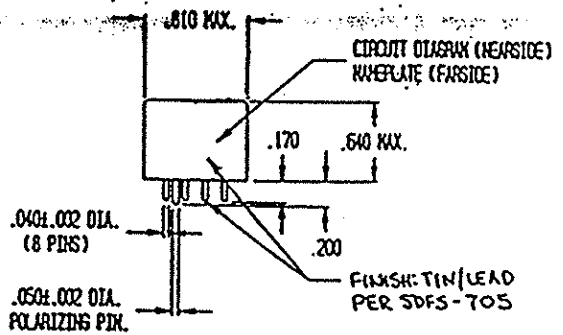

Prepared By: Date	Approved By: Date	
LFS WYNNE 3-20-96	<i>[Signature]</i> 3-21-96	
Rev	ECN No.	Date
C	97-248	12-29-97

SPECIAL INSTRUCTIONS